


RISER HANGER WITH LINING

APPLICATION:

RISER CLAMPS WITH LINING are recommended for the support and/or restraint of vertical steel pipes. A RISER CLAMP with lining is designed to attach to the pipe and to rest on a structural member or floor; it is not designed to have hanger rods attached to it to support the pipe.

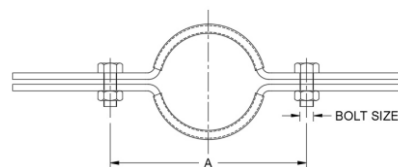

CONSTRUCTION:

RISER CLAMPS WITH LINING consists of two carbon steel flat bars bent to shape and held together by two bolts. Designed to act as a rigid support or guide for vertical pipes. The clamp should be bolted to the pipe just below support lugs or other attachments that can carry a shear load. Reduces noise upto 18dB.



MATERIAL:

Steel. Also other materials can also be provided on request

APPROVALS:

Manufacturers Standardization Society ANSI/MSS SP-69 & SP-58 (Type 8)

Federal Specification WW-H-171E & A-A-1192A (Type 8)

TEMPERATURE RANGE:

-20°C to 110°C

FINISH AVAILABLE:

Plain, Hot Dip Galvanized, Electro-Galvanized.

Product Code	Nominal Pipe Size		Pipe OD (mm)	Length between Hole centre (mm)	Bolt Size	MAX LOAD (KG)
	In.	mm				
SE – RCL 0.50	½"	DN15	21.3	57	M10	1250
SE – RCL 0.75	¾"	DN20	26.7	68	M10	1250
SE – RCL 01	1"	DN25	33.4	76	M10	1250
SE – RCL 1.25	1 ¼"	DN32	42.1	90	M10	1250
SE – RCL 1.50	1 ½"	DN40	48.2	110	M10	1250
SE – RCL 02	2"	DN50	60.3	130	M10	1850
SE – RCL 2.50	2 ½"	DN65	73.0	142	M12	1850
SE – RCL 03	3"	DN80	88.9	161	M12	2250
SE – RCL 04	4"	DN100	114.3	190	M12	3600
SE – RCL 06	6"	DN150	168.3	258	M16	4500
SE – RCL 08	8"	DN200	219.1	333	M16	4500
SE – RCL 10	10"	DN250	273.0	409	M16	5800
SE – RCL 12	12"	DN300	323.8	467	M20	7300
SE – RCL 16	16"	DN400	406.4	583	M20	7300
SE – RCL 20	20"	DN500	508.0	708	M20	13400
SE – RCL 24	24"	DN600	609.6	833	M20	13400